


M-Test LL: Different types of operation

MAGNETIC Test

Basic unit

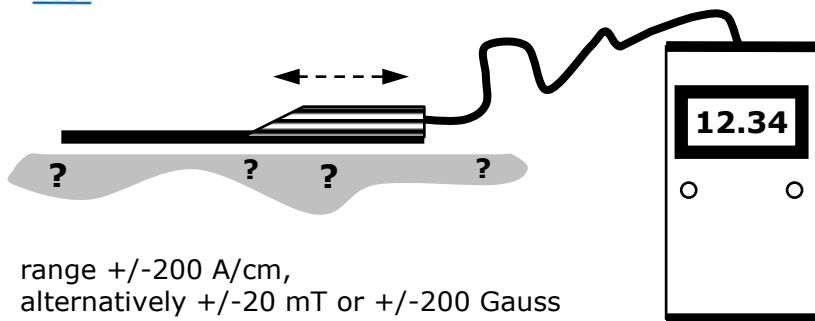


range +/-200 A/cm,
alternatively +/-20 mT or +/-200 Gauss

Available from January 2014 onwards

- LiPo battery gives an endurance of about 7h.
- Auto-Off if not used
- Charged by USB-cable from PC or USB charger.


Option: USB interface

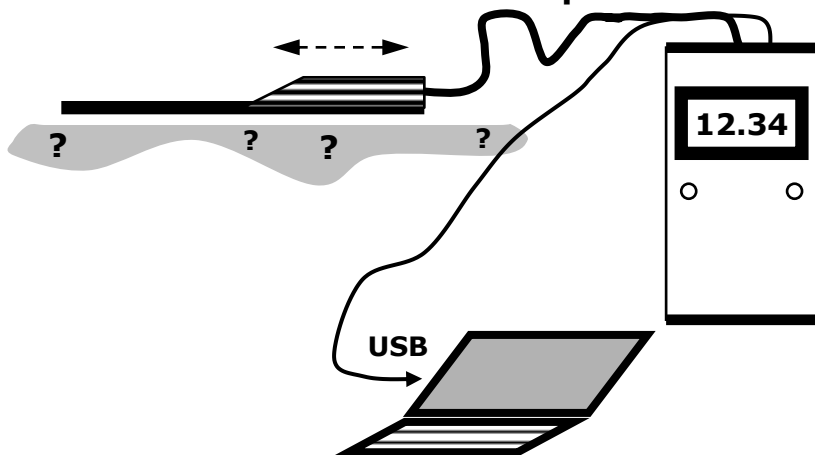

Available from February 2014 onwards

- USB-interface LabJack U3 built into basic unit.
- MS Windows® compatible program.
- Open source code to built customer specific solutions.
- Increased resolution
- Data stored in MS-Excel® compatible format.

24V probe with Labjack for PC

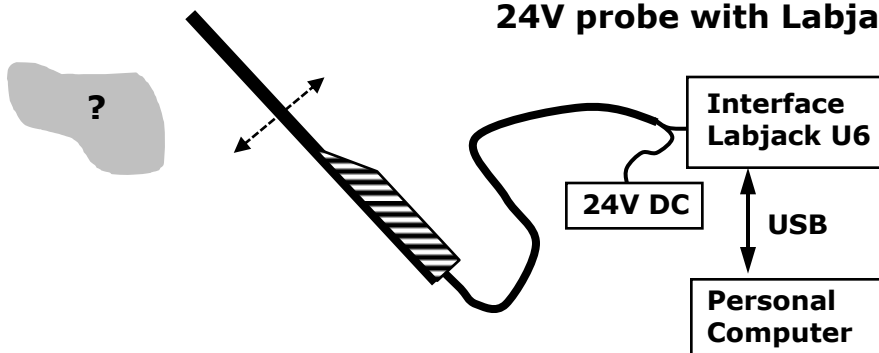


Analog out +/-71.6 mV/mT, zero reference 2,5 V

Available from March 2014 onwards

- MS Windows® compatible program.
- Open source code to built customer specific solutions.
- Increased resolution
- Data stored in MS-Excel® compatible format.

24V probe with analog output

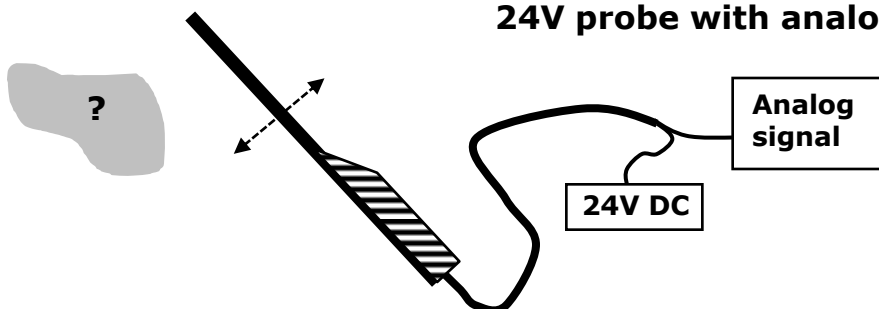

Analog out +/-71.6 mV/mT, zero reference 2,5 V

Available from January 2014 onwards

- Analog output for differential input with 0...5V Range